


Doors & Screens - Installation

The fixing methods recommended for the Blairs of Scotland doors and screens are as follows:

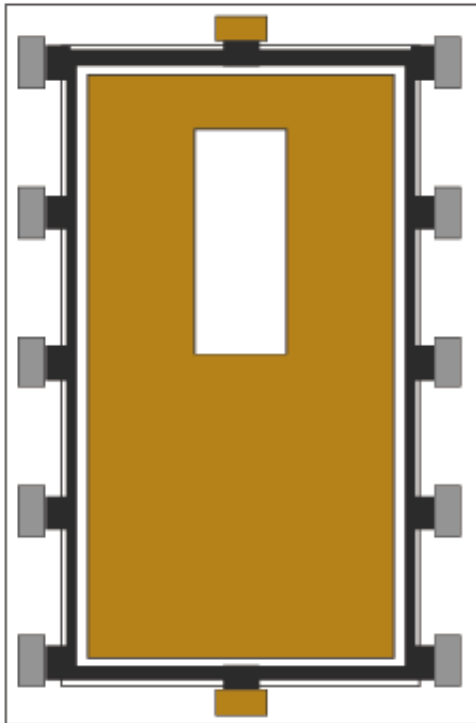

- Jamb Fixings
- Head and Sill Fixings for Double Doorsets

1. A recognised fixing method should be used eg. masonry anchors or metal ties
2. Jamb fixings should be at approximately 500mm centres. For single doorsets no fixing is required at head or sill. Double doorsets require a minimum of one central fixing in both the head and sill.
3. The unit should be offered into the opening and temporarily wedged above each jamb. The unit should be fixed plumb, square and level.
4. The function of the door should be checked and the clearances made equal by adjusting the frame prior to final fixing.
5. When fitting double doorsets the meeting stiles should be checked for flush and the frame adjusted to compensate for any minor twisting

6. ON SITE FINISHING:

If windows are not being supplied pre-finished from the factory, it is important to ensure that no paint or stain is applied onto the weather-stripping. Equally, care should be taken to make sure the hardware is kept clear of any grit or paint that would restrict the free movement of the sashes.

7. SITE PRACTICES:

when fitted, windows should not be used as access points to the building for personnel or materials, or resting points for scaffolding. This practice may seriously damage the windows and integrity of the coatings, with subsequent consequences on durability.

8. HANDLING OF SEMI & PREFINISHED WINDOWS:

Please ensure when handling or stacking such items adequate care and protection is given to avoid any damage.