


## Sash & Case MK2 - Installation

The Blairs of Scotland Sash & Case range of windows are easy to install employing traditional fitting methods.

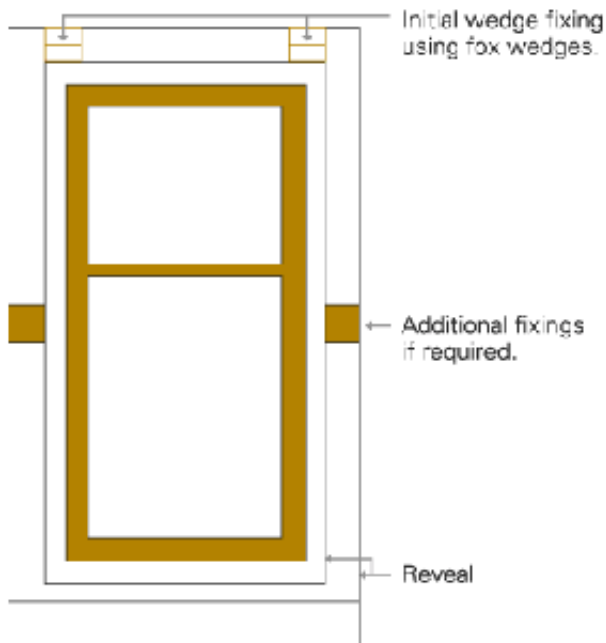

Before final fixing ensure the window is plumb, square and without twist or bend.

The fixing methods recommended for all types of Blairs of Scotland Sash & Case windows are as follows:

### **1. REMOVE SCREWS FROM LEAD WIEGHTS.**

### **2. INSERT FOW WEDGES DIRECTLY ABOVE EACH JAMB:**

By using fox wedges directly above each jamb, the window can be held in position. The window should be fixed plumb, square and without twist or bends.

### **3. ADDITIONAL FIXINGS:**

Additional fixings should be used for windows, which are greater than two meters high. For example, a suitable fixing strap fitted between the case and the stonework at the mid-height point. Again care should be taken to ensure that the jambs are straight.

### **4. ON SITE FINISHING:**

If windows are not supplied pre-finished from the factory, it is important to ensure that no paint or stain is applied onto the weather-stripping where fitted.

### **5. SITE PRACTICES:**

When fitted, windows should not be used as access points to the

building for personnel or materials, or resting points for scaffolding, as this practice may seriously damage the windows and integrity of the coatings, with subsequent consequences on durability.

**6. HANDLING OF SEMI & PREFINISHED WINDOWS:**

Please ensure when handling or stacking such items adequate care and protection is given to avoid any damage.